

STAIRCASE TIME-DELAY SWITCH 10A (REF. 55510 SPA)

DESCRIPTION



- Enables to connect and disconnect a lighting installation after a programmed time-delay.
- The activation is made by the use of Push-buttons, Rocker Push-buttons or Rocker Push-buttons with Orienting Light.
- Instalation in DIN rail track, in Panelboards.

OPERATION

- By pressing the button, the load stays on as long as the time programmed in the device.


MAXIMUM RECOMMENDED LOAD



CHARACTERISTICS


- 230V~ - 50/60Hz.
- Breaking capacity: 10A.
- Time adjustment: 45 seconds to 7 minutes.
- Dimension: 1 Módulo DIN.
- Operating temperture: -10°C a 60°C.
- Protection Index: IP20.
- Maximum leakage current: 50mA.

DIMENSIONS (mm)

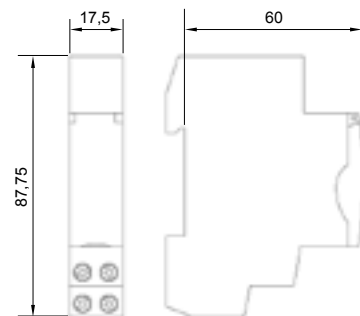

WIRING DIAGRAMS

- With 3 wires.

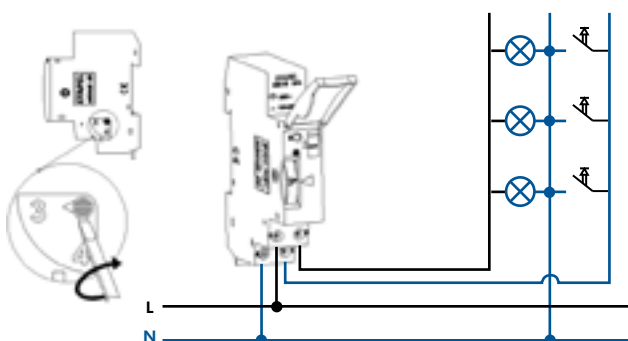

- With 4 wires.

