

3700 - SURFACE MOUNTING DEVICES

DESCRIPTION



- Products in technical thermoplastic - resistant material, non-conductive.
- Available in White (RAL 9003), the same used in EFAPEL Cable Trunkings.
- Product sold in complete form.

CHARACTERISTICS

- Mechanisms in technical thermoplastic - resistant material, non-conductive.
- For installations in surface mounting applications and/or installations with Technical Cable Trunkings.
- Control Devices
 - 10 A - 250 V~ - connections with screw terminals. It allows the usage of rigid and flexible cable.
 - Pilot Light.
 - In accordance with IEC/EN 60669-1 Standard, tested according to 19.3:

Relationship between rated current of the switch and rated power of the SBL circuit	
Rated current of the switch, I_n [A]	Rated power of the SBL circuit [W]
$I_n \leq 10$	100
$10 < I_n \leq 13$	150
$13 < I_n \leq 16$	200
$16 < I_n \leq 20$	250


SBL - Self Ballasted Lamp (CFL or LED)

■ Energy Sockets

- Earth Socket (Schuko and French types):
 - 16 A - 250 V~.
 - Connections with screw terminals or screwless terminals.
 - Available in colors White, Red and Orange.
 - In accordance with IEC 60884-1; DIN VDE 0620-1 (Schuko) and NF C 61-314 (French) Standards.
- Variety of Functions: Control Devices; Electrical Blinds Control; Energy Sockets; Radio, Television and Satellite Sockets; Telephone Sockets; Data Sockets; etc...
- Adaptable to all 10 Series Cable Trunkings - Mini Cable and Skirt using the lateral adapter for each of the cable trunkings.

DIMENSIONS (mm)

SWITCH

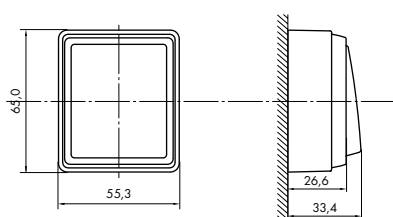

ENERGY SOCKETS

